



Technology Leadership
for Digital Cinema

TMS / LMS-2000


Theater Management System

PREFERRED PRODUCT

DIGITAL CINEMA
THEATERS
WORLDWIDE

Key Features:

- + Compact reliable 2RU, 6TB Net library
- + Very high performance 4x1GB and an optional dual 2x10Gb CX4 Ethernet
- + Highly secured RAID5 storage
- + Field proven Linux kernel OS
- + Support any Doremi server configuration from 1 to 32 screens
- + Very intuitive GUI for non IT users
- + Easy gateway from Ticketing / POS

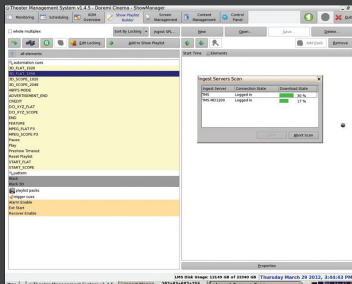

The Doremi TMS (Theatre Management System) provides a comprehensive and intuitive user interface designed for non IT users, so the booth operator will be able to take charge of the TMS operation with a few hours of training. In addition to the TMS operation, the solution provides a centralised high performance library to serve any multiplex configuration from 1 to 32 screens.

Based on 4x1Gb, or an optional dual 2x10Gb CX4 Ethernet and Hardware RAID5 storage, the LMS (Library Management System) can simultaneously ingest several screens without suffering from overload.

The base 6TB net capacity can later be easily expanded, using extension modules, to cover all kinds of multiplex requirements.


With an open gateway for the ticketing / POS, and connection to electronic delivery of medias through industry partners, the Doremi LMS ensures the highest level of integration currently available on the market to migrate a fully digital infrastructure.



TMS/LMS-2000

- ▶ CPU: E5620@2.4GHZ, TDP 80W
- ▶ RAM: 12GB DDR3 1333MHZ (6x2GB)
- ▶ System Drive: 2x 300 GB 6 Gbit SAS @ 15 000rpm RAID1
- ▶ Internal RAID: Hardware RAID5 on 4x2TB Near line SAS 6Gbit drives 7200rpm
- ▶ External RAID: Pre-installed RAID management board
- ▶ PSU: 2x 870W redundant
- ▶ Management board: iDRAD6 Express board
- ▶ DVD: SATA 16x DVD drive
- ▶ Networking: 4x1Gb and an optional dual 2x10Gb CX4 Ethernet for content delivery to screens
- ▶ Connectivity: 2x e-sata available by adding a dual e-sata board
4x USB2 ports (2 front and 2 back)
- ▶ Base Server: H 8,7cm – 2U – (3,43 inches) x W 44,5 cm (17,53 inches) x D 66,5 cm (26,17 inches)

TMS Architecture | Playback During Ingest Capability

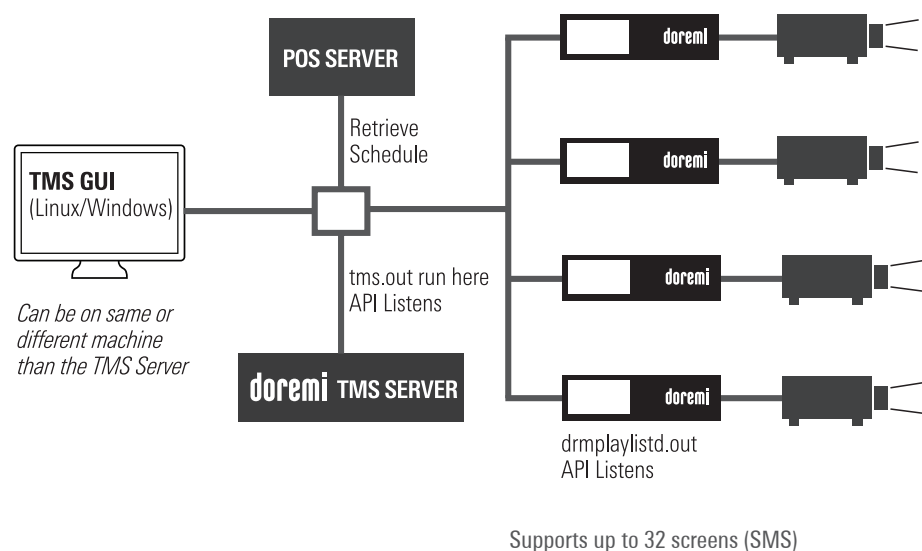

The English version of this document is the only legally binding version. Translated versions are not legally binding and are for convenience only



Technology Leadership
for Digital Cinema

Doremi Labs, Inc.
1020 Chestnut St. Burbank, CA
91506 U.S.A.

Tel : +1 (818) 562-1101
Fax : +1 (818) 562-1109
www.DoremiLabs.com

TMS.BR.002866.DRM
Version 1.0